




PVE 2316VM

Highfrequent with variable moment

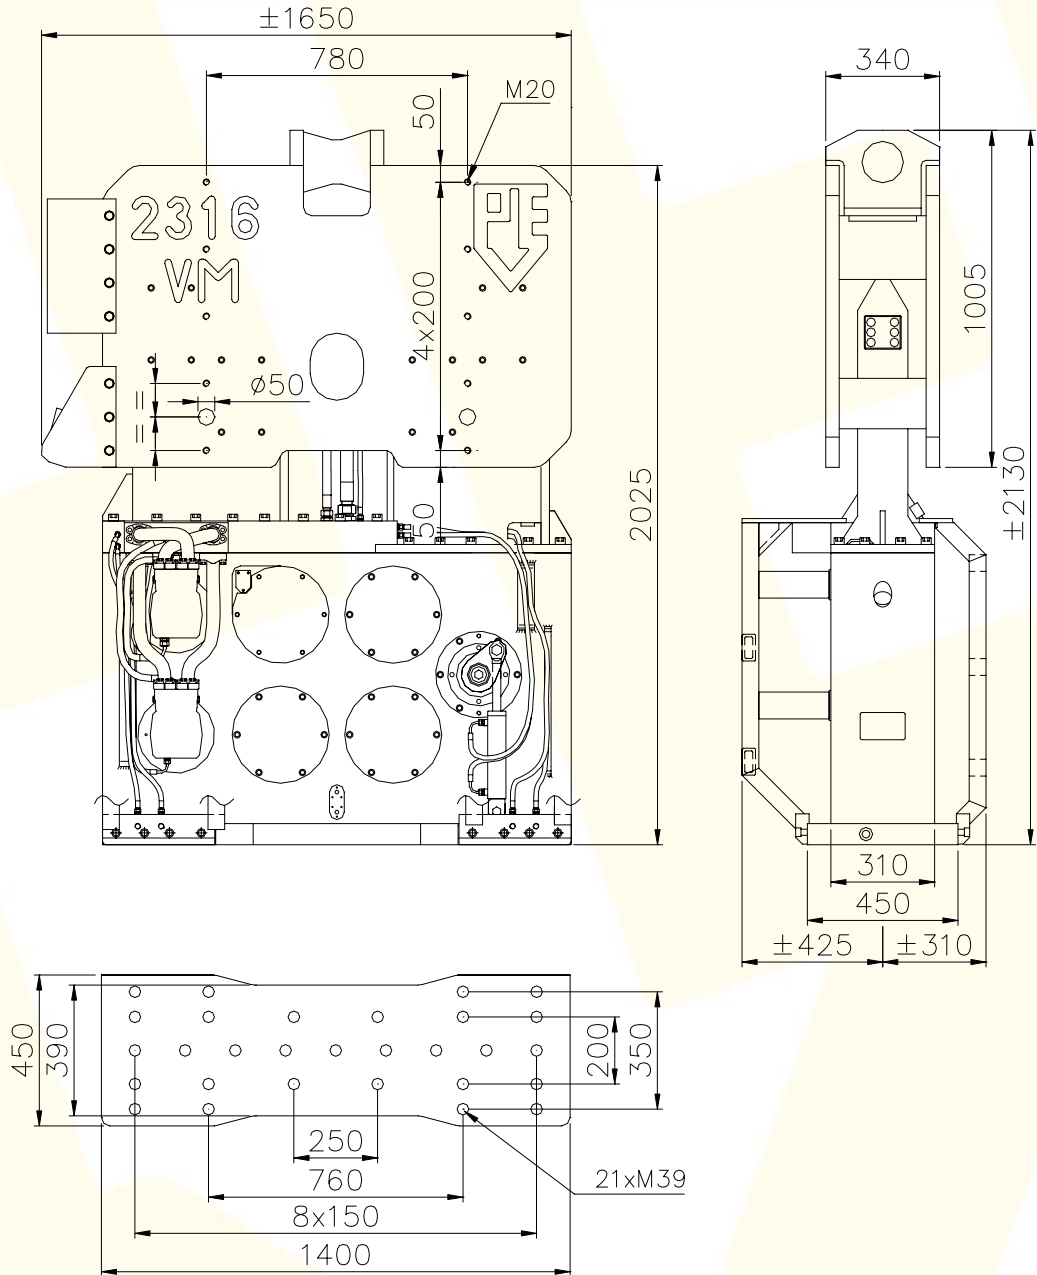

Ecc.moment:	0-16	kgm
Max.Frequency:	2300	tpm
Centr.Force:	0-928	kN
Line Pull cap.:	300	kN
Preload:	150	kN
Amplitude:	0-14	mm
Total Weight:	3000	kg
Dyn. Weight:	2350	kg
Flow:	432	l/min
Max.Pressure:	350	bar

**Dieseko's Pilling
& Vibro Equipment**

Lelystraat 49
3364 AH Sliedrecht
The Netherlands
Tel.: +31 184 410 333
Fax.: +31 184 411 386
info@dieseko.com

www.dieseko.com

Dieseko's PVE accepts no responsibility for errors or omissions in this publication or other documents which are referenced by or linked to this publication. Due to improvement and engineering progress we reserve the right to change specifications without prior notice. Contact PVE or your local dealer for further information before relying on any information contained herein.

PowerPack
till
DIESEKO 2316VM

